



www.jerko-kempen.de

MANDREL BAR SPRAY SYSTEMS

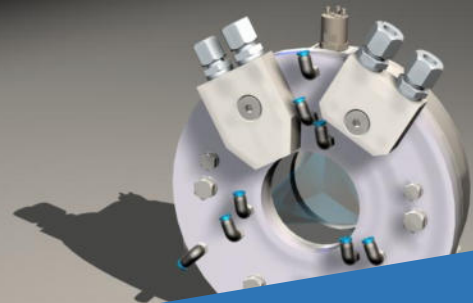

Jerko
Sprühsysteme

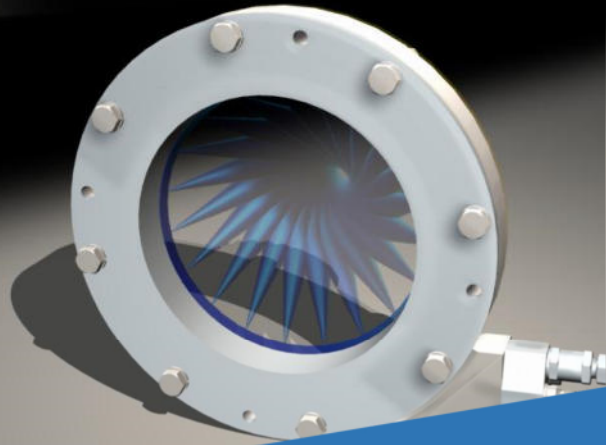

OPTIMUM NEBULISING FUNCTION — PRIME COOLING FUNCTION

This is what we offer

With our newly developed spray rings, a precise spray pattern over the whole diameter is produced.

The system can be switched over between cooling and lubrication within a few milliseconds while the spray pattern remains unchanged. The construction developed by Jerko produces an even and powerful spray pattern with ideal nebulisation and a high impact speed.

Optimum cooling of the tools within the shortest time!

The construction of the Jerko spray rings is robust and simple. Clogging, extensive repair and adjustments are now a thing of the past.

The modular design allows the use of all diameters as well as individual sections thanks to special nozzles.

The advantages — an overview

- **Fast switchover between cooling and lubrication**
- **Inexpensive spray rings**
- **Maintenance-free**
- **Modular design for all diameters**
- **Robust design**
- **Designed and built according to Machinery Directive 2006/42/EC**

Standard sizes

Spray ring

Spray range:

Ø 40–800 mm

Installed height:

from 40 mm

Options:

ring nozzle blowing air

2nd medium (e.g. graphite)

Segmented spray ring

Spray range:

Ø 40–800 mm

Installed height:

from 60 mm

Options:

multi-substance nozzles

ring nozzle blowing air



www.jerko-kempen.de

**BENEFIT FROM THE COMPETITIVE
ADVANTAGE OF THE TECHNOLOGY
LEADER**

JERKO — your goal, our challenge

info@jerko-kempen.de

+49 2152 9103 0